asecos

ID-Nr. 30074-049

Model Q90.195.060.WDAC



| Dimensions | |
|-----------------------------------------------------------------------------------------|-----------------|
| Width (external) | 599 mm |
| Depth (external) | 615 mm |
| Height (external) | 1953 mm |
| Width (internal) | 450 mm |
| Depth (internal) | 522 mm |
| Height (internal) | 1647 mm |
| The available internal dimensions can vary depending on the interior equipment package. | |
| | |
| Weight / Load | |
| Weight without interior equipment | 265 kg |
| Distributed load | 894 kg/m² |
| Maximum load | 600 kg |
| | |
| Ventilation | |
| Extraction air | 75 DN |
| minimum exhaust air quantity 10 times | 4 m³/h |
| Pressure drop inside the cabinet | 5 Pa |
| | |
| Colouring / Surface finish | |
| Body colour code | RAL 7016 |
| Body colour | anthracite grey |
| Body surface finish | textured |
| Door / Drawer colour | asecos silver |
| Door / Drawer surface finish | textured |
| | |
| General Information | |
| Number of doors | 1 |
| Door opening angle | 89.00° |
| Depth with open doors | 1128 mm |
| Interiour grid dimension | 32 mm |
| Entry width transport base | 526 mm |
| Entry height transport base | 90 mm |
| Customs tariff number | 94032080 |
| | |






Safety storage cabinet Q-PEGASUS-90 Model Q90.195.060.WDAC, body colour anthracite grey (RAL 7016), with wing door in asecos silver


Safe and approved storage of flammable hazardous substances in working areas

Function / construction:

- Robust construction and longevity: triple hinged door, safety elements assembled outside the storage compartment for increased protection against corrosion, scratch- and impact-resistant surface, easy to clean
- User-friendly and safe: door open arrest system (standard), convenient and safe removal or storage of containers
- Always closed: serial automatic door closing (TSA) releases arrested door after approx. 60 seconds; acoustic and visual signal before closing
- No unauthorised use: door lockable with cylinder locking (integration in an existing locking system possible) and locking state indicator (red/green)
- **Easy transport:** integrated transport base with removable, optional base cover
- Easy alignment: adjusting aids to compensate for uneven floor
- Ventilation: integrated air ducts ready for connection (DN 75) to a technical exhaust system, spinning wheel in the exhaust grid as an indicator of sufficient technical ventilation

Dimensione

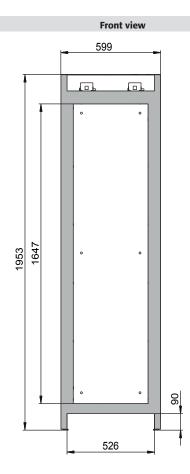

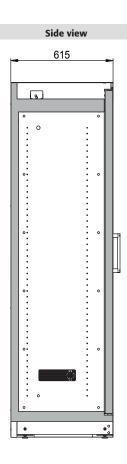

Top view

For further information please visit www.asecos.com

