


**Dimensions**

<b>Width (external)</b>	1196.00 mm
<b>Depth (external)</b>	616.00 mm
<b>Height (external)</b>	1298.00 mm
<b>Width (internal)</b>	1050.00 mm
<b>Depth (internal)</b>	524.00 mm
<b>Height (internal)</b>	1072.00 mm

The available internal dimensions can vary depending on the interior equipment package.

**Weight / Load**

<b>Weight without interior equipment</b>	270 kg
<b>Distributed load</b>	450.00 kg/m <sup>2</sup>
<b>Maximum load</b>	600 kg

**Ventilation**

<b>Extraction air</b>	75 DN
<b>minimum exhaust air quantity 10 times</b>	6 m <sup>3</sup> /h
<b>Pressure drop inside the cabinet</b>	5 Pa

**Colouring / Surface finish**



<b>Body colour code</b>	RAL 7035
<b>Body colour</b>	Light grey
<b>Body surface finish</b>	plain
<b>Door / Drawer colour code</b>	RAL 7035
<b>Door / Drawer colour</b>	Light grey
<b>Door / Drawer surface finish</b>	plain

**General Information**

<b>Number of doors</b>	2
<b>Door opening angle</b>	89.00°
<b>Interior grid dimension</b>	32 mm
<b>Depth with open doors</b>	1226 mm
<b>Customs tariff number</b>	94032080

**Safety storage cabinet S-PEGASUS-90**
**Model S90.129.120.WDAC, light grey (RAL 7035)**
**Safe and approved storage of flammable hazardous substances in working areas**
**Function / construction:**

- **Robust construction and longevity:** triple hinged door, body made of powder-coated sheet steel, safety elements assembled outside the cabinet for increased protection against corrosion
- **Effortless use:** one-hand operation for double-door cabinets (AGT)
- **User-friendly and safe:** door open arrest system (standard), convenient and safe removal or storage of containers
- **Always closed:** serial automatic door closing (TSA) releases arrested doors after approx. 60 seconds; acoustic and visual signal before closing
- **No unauthorised use:** doors lockable with profile cylinder (integration in an existing locking system possible)
- **Easy alignment:** adjusting aids to compensate for uneven floor
- **Ventilation:** integrated air ducts ready for connection (DN 75) to a technical exhaust system

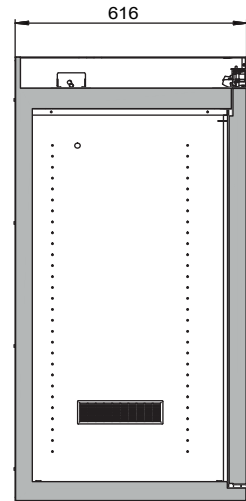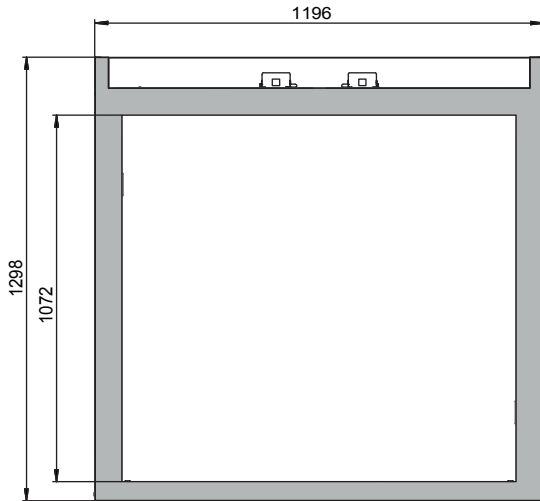

Top view

