

## Model UB90.060.089.UL.S




















Safe and approved storage of flammable hazardous substances in working areas

## **Function / construction:**

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **User-friendly:** drawer remains open in any position, interior of drawer completely visible access to all containers
- **Safe:** drawer fitted with earthing wire incl. clamp as standard, seal welded sump, drawers are self-closing in the event of fire
- **No unauthorised use:** drawer lockable with cylinder lock and locking state indicator (red/green)
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system



Dimensions	
Width (external)	893.00 mm
Depth (external)	574.00 mm
Height (external)	600.00 mm
Width (internal)	771.00 mm
Depth (internal)	452.00 mm
Height (internal)	502.00 mm
The available internal dimensions can vary depending on the interior equipment package.	

Weight / Load	
Weight without interior equipment	140 kg
Distributed load	313.00 kg/m <sup>2</sup>
Maximum load	300 kg
Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	1 m³/h
Differential pressure (10 times air change)	1 Pa
Colouring / Surface finish	
Body colour code	
Body colour	Laboratory white (sim. RAI

Body colour	9016)
Body surface finish	plain
Door / Drawer colour code	
Door / Drawer colour	Laboratory white (sim. RAL 9016)
Door / Drawer surface finish	plain
<b>General Information</b>	


20.00 litres


94032080

**Capacity drawer** 

**Customs tariff number** 

Front view Side view



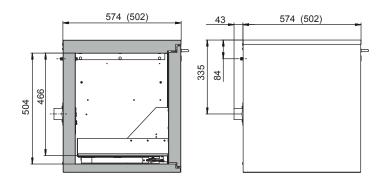

Top view

