asecos

ID-Nr. 30348-001 Model S90.196.120.MV.WDAS



Dimensions Width (external)

width (external)	1190.00 11111
Depth (external)	616.00 mm
Height (external)	1968.00 mm
Width (internal)	450.00 mm
Depth (internal)	524.00 mm
Height (internal)	1742.00 mm

1196.00 mm

94032080

The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	515 kg
Distributed load	576.00 kg/m ²
Maximum load	600 kg
Ventilation	
Extraction air	75 DN
minimum exhaust air quantity 10 times	8 m³/h
Pressure drop inside the cabinet	5 Pa
Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	Light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	Light grey
Door / Drawer surface finish	plain
General Information	
Number of doors	2
Door opening angle	89.00°
Interiour grid dimension	32 mm
Depth with open doors	1174 mm




Safety storage cabinet S-CLASSIC-90 Model S90.196.120.MV.WDAS, light grey (RAL 7035)

Safe and approved storage of flammable hazardous substances in working areas


Function / construction:


- Robust construction and longevity: triple hinged door, body
 made of powder-coated sheet steel, safety elements assembled
 outside the cabinet for increased protection against corrosion
- **Two in one:** 2 compartments (vertical seperated) allow the storage of flammable liquids and aggressive chemicals in one cabinet
- User-friendly and safe: door open arrest system (standard), convenient and safe removal or storage of containers
- No unauthorised use: doors lockable with profile cylinder (integration in an existing locking system possible)
- Easy alignment: adjusting aids to compensate for uneven floor
- **Ventilation:** integrated air ducts ready for connection (DN 75) to a technical exhaust system

Customs tariff number

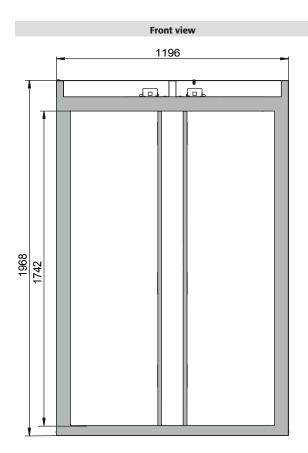

Side view

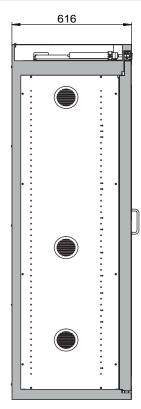



For further information please visit www.asecos.com

