## ID-Nr. 37028-001

# Model UB90.060.110.050.UL.ST



## Safety storage under bench cabinet UB-ST-90 Model UB90.060.110.050.UL.ST, light grey (RAL 7035)

Safe and approved storage of flammable hazardous substances in working areas

#### **Function / construction:**

- Robust construction and longevity: body made of powdercoated sheet steel
- User-friendly and safe: door and drawer remain open in any position, interior of the cabinet completely visible access to all containers, 93° opening of the wing door
- **Safe:** drawer fitted with earthing wire incl. clamp as standard, seal welded sump, drawers are self-closing in the event of fire
- No unauthorised use: door and drawer lockable with cylinder lock and locking state indicator (red/green)
- Mobile: castors with plinth (optionally available), easy moving of the cabinet
- Ventilation: integrated air ducts ready for connection (DN 50) to a technical exhaust system



asecos

### Dimensions

Width (external)	1102.00 mm
Depth (external)	502.00 mm
Height (external)	600.00 mm
Width (internal)	979.00 mm
Depth (internal)	382.00 mm
Height (internal)	502.00 mm
The southly interest dimensions are used down	diana any share takaning a subananak anadaran


The available internal dimensions can vary depending on the interior equipment package.

Weight / Load	
Weight without interior equipment	160 kg
Distributed load	278.00 kg/m <sup>2</sup>
Maximum load	300 kg
Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	2 m³/h
Differential pressure (10 times air change)	1 Pa
Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	Light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	Light grey
Door / Drawer surface finish	plain
General Information	
Number of drawers	1
Capacity drawer	10.00 litres
Number of doors	1
Door opening angle	93.00°
Depth with open doors	1025 mm


Customs tariff number


94032080



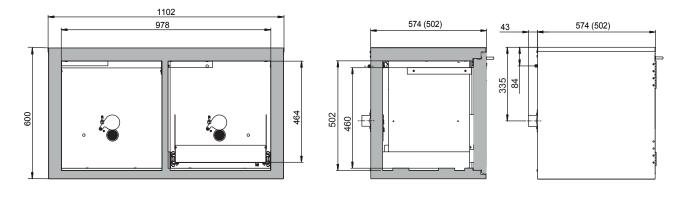







For further information please visit www.asecos.com